


ELETTRODRAGO ELEKTROS



- Front with "AVANT" type design
- Totally independent chambers
- Armored st/st electric elements
- Maximum working temperature 350°
- New Hybrid Control 5" panel for each room (Hi Control) with centralized USB connection
- 100 programs digital panel (Flex)
- Trizone dynamic control system (TZS) mouth zone, center zone and rear zone, with mouth temperature regulation by dedicated probe (Hi Control)
- Power distributor included
- Automatic start/stop daily and weekly included
- Dynamic QR-Code of anomalies diagnosis (Hi Control)
- Steamer for each chamber with timed electrovalve
- Doors with low emission dismountable glass
- New lighting system with 2 lights for each room, positioned in the mouth of easy replacement
- Baking plates in "armored concrete"
- Electric board accessible from the front for easy maintenance (5-chamber ovens: electric board above the oven or hanging)
- Anticorrosion kit (i.e. steam generators heads and connecting pipes)
- Hood with one speed exhaust fan
- Removable hood grid in stainless steel

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø 3/8" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Steam exhaust output</i>	Ø 250 mm*

* Minimum diameter pipe exhaust fumes 200 mm.

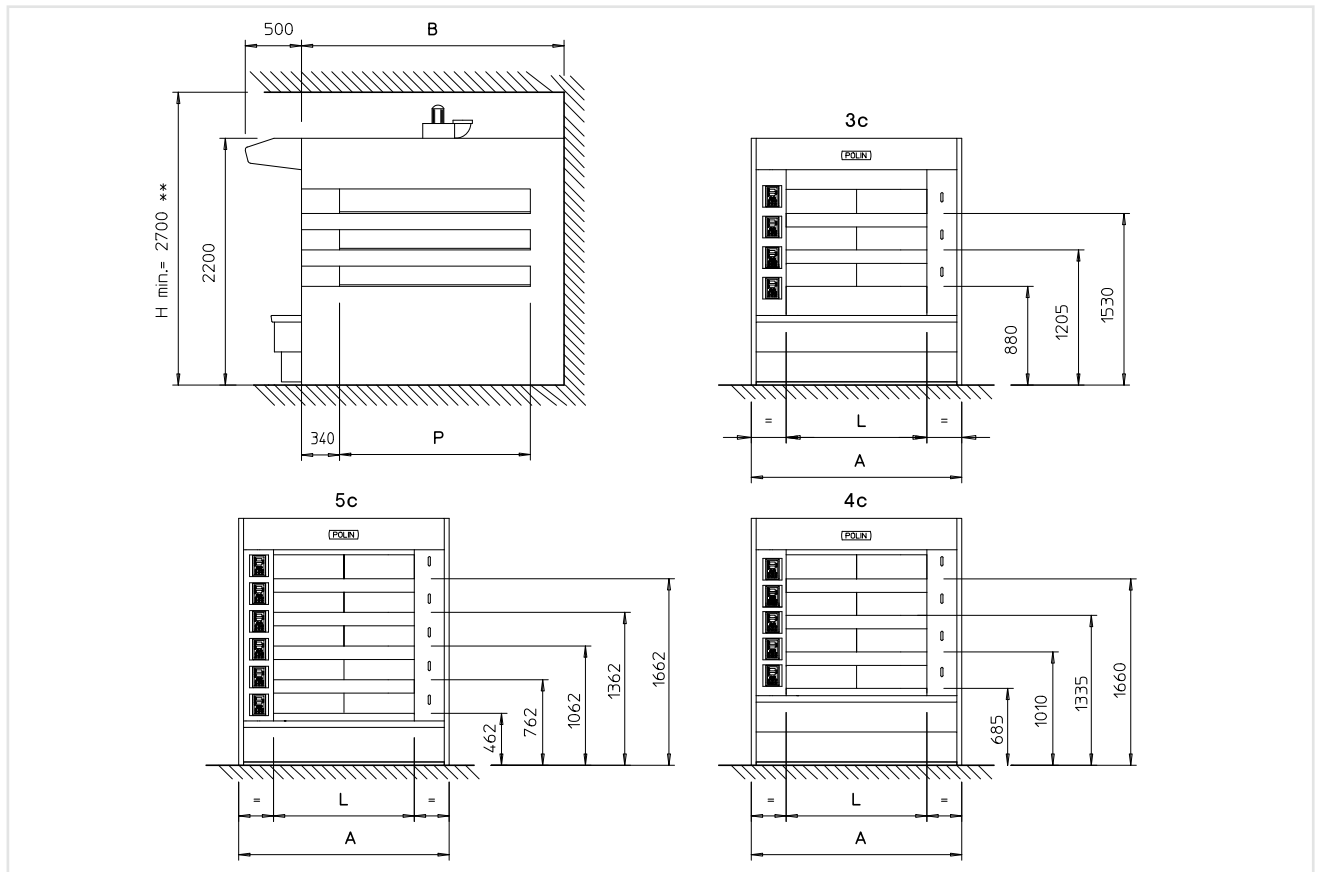

	Chambers	Useful dimension chambers		Overall dimensions		Installed power				
		Width	Depth	Width	Depth	Electric system calculator		With computer-economizer		With computer economizer for bakery manag.
		L mm	P mm	A mm	B mm	kW	Super Power	kW	Super Power	kW
6,3 / 124x170-3	3	1240	1700	1875	2340	25,3	41,5	16,9	27,7	12,8
8,4 / 124x170-4	4	1240	1700	1875	2340	33,5	55,1	25,1	41,2	16,9
10,5 / 124x170-5	5	1240	1700	1875	2340	41,8	68,7	33,3	54,9	21,0
8,0 / 124x214-3	3	1240	2140	1875	2780	31,3	53,5	20,9	35,7	15,8
10,6 / 124x214-4	4	1240	2140	1875	2780	41,5	71,1	31,1	53,2	20,9
13,3 / 124x214-5	5	1240	2140	1875	2780	51,8	88,7	41,3	70,9	26,0
9,6 / 124x258-3	3	1240	2580	1875	3220	34,9	61,0	23,3	40,7	17,6
12,8 / 124x258-4	4	1240	2580	1875	3220	46,3	81,1	34,7	60,7	23,3
16,0 / 124x258-5	5	1240	2580	1875	3220	57,7	101,1	46,1	80,8	29,0

	Chambers	Useful dimension chambers		Overall dimensions		Installed power				
		Width	Depth	Width	Depth	Electric system calculator		With computer-economizer		With computer economizer for bakery manag.
	n°	L mm	P mm	A mm	B mm	kW	Super Power	kW	Super Power	kW
9,4 / 186x170-3	3	1860	1700	2500	2340	33,0	57,2	22,0	38,1	16,6
12,5 / 186x170-4	4	1860	1700	2500	2340	43,7	76,0	32,7	56,9	22,0
15,8 / 186x170-5	5	1860	1700	2500	2340	54,5	94,8	43,5	75,8	27,4
12,0 / 186x214-3	3	1860	2140	2500	2780	41,1	72,5	27,4	48,3	20,7
16,0 / 186x214-4	4	1860	2140	2500	2780	54,6	96,4	40,9	72,3	27,4
19,9 / 186x214-5	5	1860	2140	2500	2780	68,0	120,4	54,3	96,2	34,2
14,0 / 186x258-3	3	1860	2580	2500	3220	47,2	82,7	31,5	55,1	23,7
19,0 / 186x258-4	4	1860	2580	2500	3220	62,7	110,0	47,0	82,5	31,5
24,0 / 186x258-5	5	1860	2580	2500	3220	78,2	137,4	62,5	109,8	39,2