


DRAGO 895



- N° 1 steamer for each deck
- Baking plates in "fibre-cement"
- Hood with exhaust fan
- Chimney silencer and soundproof panels in the bench
- Safety thermostat
- Doors with low emission dismountable glass
- Steam generators control by electrovalve with timer (SIMPLE excluded)
- Automatic start (excluding SIMPLE)
- Baking timer (excluding SIMPLE)

| | |
|-----------------------------|--------------|
| <i>Power inlet</i> | 400/3N~/50 |
| <i>Water inlet</i> | Ø ¾" GAS |
| <i>Steamer drain</i> | Ø 1" GAS |
| <i>Fuel pipe inlet</i> | ----- |
| <i>Steam exhaust uotput</i> | Ø 250 mm (*) |
| <i>Fume exhaust pipe</i> | Ø 200 mm |

(*) Minimum diameter pipe exhaust fumes 200 mm

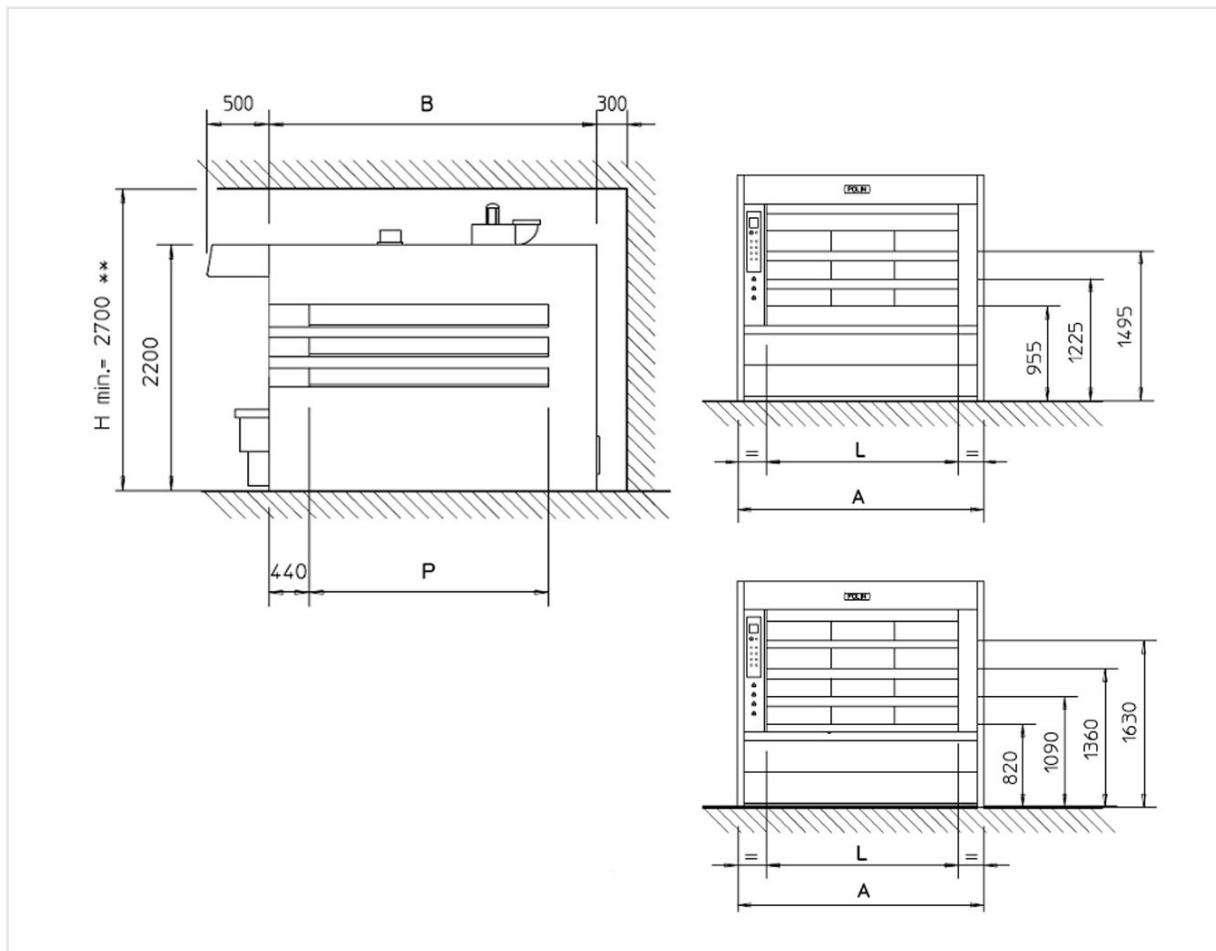

** 2800 with a 2 speed motor

| | Baking Surface | Chambers | Useful Dimension Chambers | | Overall dimensions | | Installed power | |
|-----------------------|----------------|----------|---------------------------|-------|--------------------|-------|-----------------|------------|
| | | | Width | Depth | Width | Depth | Thermic | Electrical |
| | mq | n° | L mm | P mm | A mm | B mm | kcal/hx1000 | kW |
| 9,4/186x170-3 | 9,4 | 3 | 1860 | 1700 | 2595 | 3000 | 90 | 4,8 |
| 12,5/186x170-4 | 12,5 | 4 | 1860 | 1700 | 2595 | 3000 | 89 | 4,8 |
| 12/186x214-3 | 12 | 3 | 1860 | 2140 | 2595 | 3440 | 90 | 4,8 |
| 16/186x214-4 | 16 | 4 | 1860 | 2140 | 2595 | 3440 | 89 | 4,8 |
| 14/186x258-3 | 14 | 3 | 1860 | 2580 | 2595 | 3880 | 90 | 4,8 |
| 19/186x258-4 | 19 | 4 | 1860 | 2580 | 2595 | 3880 | 89 | 4,8 |